





## Home Series

### Spill Proof Water Dispensers

#### WARNING

TO REDUCE THE RISK OF INJURY AND PROPERTY DAMAGE, USER MUST READ THIS MANUAL BEFORE ASSEMBLING, INSTALLING & OPERATING DISPENSER.

#### SAVE THIS MANUAL FOR FUTURE USE

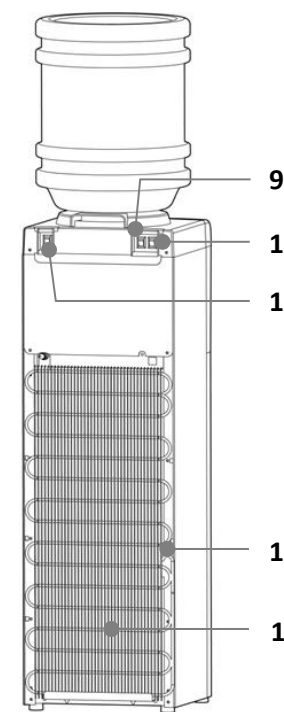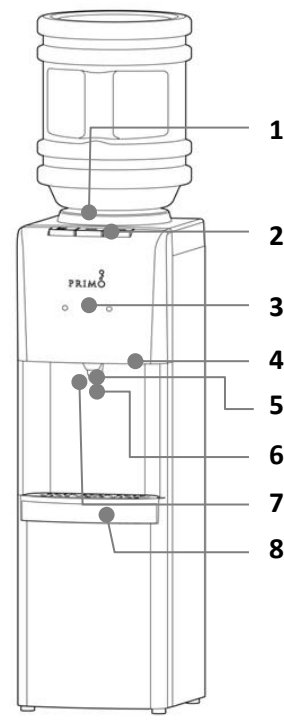

## FEATURES & FUNCTIONS

### Front

- Spill Proof Bottle Receptacle with Leak Guard** (Leak Guard Not on All Models) – For fast, easy, spill-proof loading. Reduces leaks from worn & damaged bottles.
- Water Dispensing Controls** – Depress to dispense.
- Function Lights** (Not on All Models) - Green light below snowflake indicates dispenser is cooling water. Green light below wavy lines indicates dispenser is heating water.
- Drain Hole** – Should water accidentally spill through the controls and into the cabinet, it will come out here and go into the drip tray. This helps ensure water does not interact with electrical wiring and components.
- Spout(s)** – Amount vary by model. Water dispenses here.
- Bottle Support(s)** (Not on All Models) - Helps align sports bottles and glasses with spout(s) to eliminate spills.
- LED Nightlight** (Not on All Models) – Located behind bottle support(s). Helps in low light situations.
- Drip Tray** – Dishwasher safe. Slides in and out. Red float rises to top to inform you it is time to empty the tray. (Float Not on All Models)

### Back

- Activation Switch for Cooling** – Green (Not on All Models)
- Activation Switch for Heating** – Red (Not on All Models)
- Activation Switch for LED Nightlight** – Blue (Not on All Models)
- Hot Tank Drain** – Use when cleaning. Caution: Water can flow at extremely high temperatures. Failure to use properly can cause personal injury.
- Plug & Cord** – Only plug into a ground fault interrupting receptacle.

### Install Water Bottle

Bottle not included. Requires standard 3, 4 or 5 gallon water dispenser bottles. Visit [www.PrimoWater.com](http://www.PrimoWater.com) to find Primo Water at a store near you.

- Remove tamper seal from top of bottle cap. Do NOT remove plastic cap.
- Clean bottle cap and neck with a cloth and warm soapy water, then rinse.
- Lift bottle and insert onto the probe. Apply slight pressure until the plug inside the cap pushes in and the bottle is seated. Water will begin to flow into the reservoirs causing air bubbles in the bottle.

### Provide Electricity

Plug cord into a ground fault interrupting receptacle.

### Activate Cold Switch

**Notice: This unit will not dispense cold water until the switch is activated.**

To activate, push top side of the green switch in to start cooling water. If you do not want cold water leave switch in off position – bottom side pushed in.

### Activate Hot Switch (Not on All Models)

**Notice: This unit will not dispense hot water until the switch is activated.**

To activate, push top side of the red switch in to start heating water. If you do not want hot water leave switch in off position – bottom side pushed in.

### Activate Nightlight (Not on All Models)

To activate, push top side of the blue switch in. The LED bulb behind center spout will light. If you do not want a nightlight leave switch in off position – bottom side pushed in.

### Register

While you wait for the water to get to the desired temperatures, please register your dispenser. This will be helpful should you need customer service assistance in the future. Go to [www.PrimoWater.com/support](http://www.PrimoWater.com/support).

## OPERATION

This Home Series water dispenser has been tested and sanitized prior to packing and shipping. During transit dust and odors can accumulate in the tank and lines. Dispense and dispose at least one quart of water prior to drinking any water.

## WARNINGS & SAFETY PRECAUTIONS

To reduce risk of injury and property damage, user must read this entire guide before assembling, installing & operating dispenser.

Failure to execute the instructions in this manual can cause personal injury or property damage.

Models that heat water dispense at very high temperatures. Failure to use properly can cause personal injury.

When operating this dispenser, always exercise basic safety precautions, including the following:

- Prior to use, this dispenser must be properly assembled and installed in accordance with this manual.
- This dispenser is intended for water dispensing only. Do NOT use other liquids. Do NOT use for other purposes. Never use any other liquid in the dispenser other than known and microbiologically safe bottled water.
- For indoor use only. Keep water dispenser in a dry place away from direct sunlight. Do NOT use outdoors.
- Install and use only on a hard, flat and level surface.
- Do NOT place dispenser into an enclosed space or cabinet.
- Do NOT operate dispenser in the presence of explosive fumes.
- Position back of dispenser no closer than 4 inches from wall and permit free airflow between wall and dispenser. There must be at least 4 inches clearance on the sides of the dispenser to permit airflow.
- The dispenser is intended to be plugged into a ground fault interrupting receptacle.
- Do not use an extension cord with your water dispenser.
- Always grasp plug and pull straight out from outlet. Never unplug by pulling on power cord.
- Do NOT use dispenser if cord becomes frayed or otherwise damaged.
- To protect against electric shock, do NOT immerse cord, plug, or any other part of dispenser in water or other liquids.
- Ensure dispenser is unplugged prior to cleaning.
- Never allow children to dispense hot water without proper and direct supervision. Unplug unit to prevent unsupervised use by children.
- Do not dispense hot water if water bottle is empty.
- Service should be performed only by a certified technician. Please contact us at 866-429-7566 for assistance.



### Dispensing Cold Water

After setup, it will take 1 hour to get water to maximum cold temperature. During this time the compressor will run continuously. This is normal.

- Position bottle, glass, pitcher or cooking pot below spout.
- Depress cold water control (dark blue) downward to start water flow.
- Release control once desired fill level is achieved.

### Dispensing Cool Water (Not on All Models)

- Position bottle, glass, pitcher or cooking pot below spout.
- Depress cool water control (light blue) downward to start water flow.
- Release control once desired fill level is achieved.

### Dispensing Hot Water (Not on All Models)

**CAUTION: This unit dispenses water at temperatures that can cause severe burns. Avoid direct contact with hot water. Keep children and pets away from unit while dispensing. Never allow children to dispense hot water without proper and direct supervision. Unplug unit to prevent unsupervised use by children.**

After setup, hot water will be available in 15-20 minutes.

- Position bottle, glass, pitcher or cooking pot below spout.
- Slide red button away from you and depress control downward to start water flow.
- Release control once desired fill level is achieved.

## MAINTENANCE

For best taste, performance and hygiene, clean the cold tank at least every 3 months and your cabinet, controls and spout each time you change your water bottle.. Empty and clean drip tray as needed. To minimize mineral deposits, use only high quality purified bottled water such as Primo.

For instructions and videos for maintaining your dispenser please visit - <http://www.primowater.com/support>.

## LIMITED WARRANTY

Primo Water Corporation, (“Vendor”) warrants to the original purchaser of this dispenser, and to no other person, that if this dispenser is assembled and operated in accordance with the printed instructions accompanying it, then for a period of one (1) year from the date of purchase, all parts in such dispenser shall be free from defects in material and workmanship. Vendor may require reasonable proof of your date of purchase from an authorized retailer or distributor. Therefore, you should retain your sales slip or invoice. The Limited Warranty shall be limited to repair or replacement of parts, which prove defective under normal use and service and which Vendor shall determine in its reasonable discretion upon examination to be defective. Before returning any parts, you should contact Vendor’s Customer Care Department using the contact information listed below. If Vendor confirms, after examination, a defect covered by this Limited Warranty in any returned part, and if Vendor approves claim, Vendor will replace such defective part without charge. If you return defective parts, transportation charges must be prepaid by you. Vendor will return replacement parts to original purchaser, freight or postage prepaid. For units purchased outside of the continental US (limited to Hawaii, Alaska, and Puerto Rico), dispensers determined to be defective by the Vendor should be returned or exchanged at the original point of purchase within the warranty period.

The Limited Warranty does not cover any failures or operating difficulties due to accident, abuse, misuse, alteration, misapplication, improper installation or improper maintenance or service by you or any third party, or failure to perform normal and routine maintenance on the dispenser, as set out in the User’s Manual. In addition, the Limited Warranty does not cover damages to the finish, such as scratches, dents, discoloration or rust after purchase.

The Limited Warranty is in lieu of all other express warranties. Vendor disclaims all warranties for products that are purchased from seller other than authorized retailers or distributors. AFTER THE PERIOD OF THE ONE (1) YEAR EXPRESS WARRANTY, VENDOR DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. FURTHER, VENDOR SHALL HAVE NO LIABILITY WHATSOEVER TO PURCHASER OR ANY THIRD PARTY FOR ANY SPECIAL, INDIRECT, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL DAMAGES. Vendor assumes no responsibility for any defects caused by third parties. This Limited Warranty gives the purchaser specific legal rights; a purchaser may have other rights depending upon where he or she lives. Some jurisdictions do not allow exclusion or limitation of special, incidental or consequential damages, or limitations on how long a warranty lasts, so the above exclusion and limitations may not apply to you.

**Primo Water Corporation**  
101 N. Cherry St. Suite 501, Winston-Salem, NC 27101  
[www.PrimoWater.com](http://www.PrimoWater.com)

## TROUBLESHOOTING

### Water is leaking.

- Bottle may have a leak that is too large for the Leak Guard feature to stop. Remove bottle, dispense one quart of water and install new bottle.
- If leak remains, remove bottle and call 866-429-7566 for assistance.

### No water is coming from the spout.

- Make sure the bottle is not empty. If empty, replace it.
- Make sure to push the water controls in fully.

### Cold water is not cold.

- It takes up to one hour after setup to dispense cold water.
- Make sure the power cord is properly connected to a working outlet.
- Make sure the back of the dispenser is at least 4 inches from a wall and there is free airflow on all 4 sides of the dispenser.
- Make sure green switch on back of dispenser is ON.
- If water still isn’t cold, please call 866-429-7566 for assistance.

### Hot water is not hot. (Not on All Models)

- It takes 15-20 minutes after setup to dispense hot water.
- Make sure the power cord is properly connected to a working outlet.
- Make sure red switch on back of dispenser is ON.

### Nightlight Isn’t Working (Not on All Models)

- Make sure the power cord is properly connected to a working outlet.
- Make sure nightlight switch on back of dispenser is ON.


### Dispenser Is Noisy

- Make sure the dispenser is positioned on a level surface.

This Home Series water dispenser has been designed and manufactured to provide dependable and safe service if installed, set up, operated and maintained as directed. Follow all instructions in the order provided.

## SET UP

All hardware is included. Set up requires a Phillips screwdriver (not included).



### Locate Dispenser


**Notice: Do NOT plug power cord into wall outlet until instructed.**

- Place dispenser upright.
- Locate dispenser on a hard and level surface in a cool shaded location near a ground fault interrupting receptacle.
- Position dispenser so the back is at least 4 inches from wall and there are at least 4 inches of clearance on both sides.

### Install Bracket

**CAUTION: Dispenser must be securely anchored to wall as shown to prevent accidental tip hazard.**

- Clip bracket onto back right corner of dispenser as shown in illustration.
- Install plastic anchor directly into sheet rock using a Phillips screwdriver. DO NOT drill hole into sheet rock first when using this anchor.
- Secure by installing screw through bracket and into the anchor.

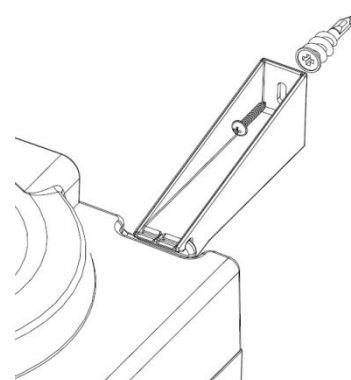

Note: Remove screw to free dispenser for cleaning or relocating.

### Install Drip Tray & Grid

- Remove drip tray and grid from protective packaging.
- Slide drip tray assembly into position until it is secure.